

# HANGING SPECIFICATIONS

## Eye Hooks with Picture Wire

Position 1/3 of the way down from the top. Eye Hooks can be positioned on the inside of the back of the frame/stretched canvas frame or on the face of the back of the frame. The picture wire should be tight (no slack).


Eye Hook Inside Frame:



Eye Hook on Top/Face of Frame:




Tight Wire (NO SLACK)

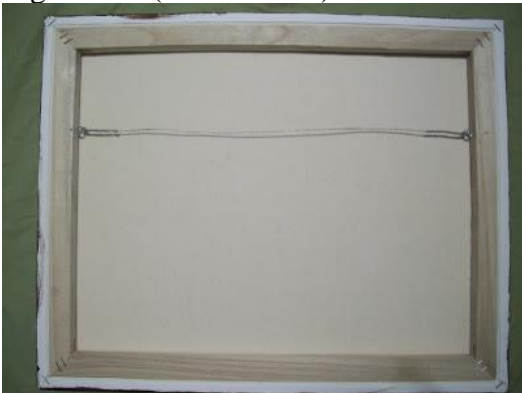

Knot guide for picture wire:

### LARK'S HEAD KNOT

Also called...  
Lark's foot, Cow  
hitch, Girth hitch,  
Ring hitch,  
Lanyard hitch,  
Bale Sling hitch,  
Baggage Tag  
Loop, Tag Knot,  
Deadeye hitch,  
Running eye

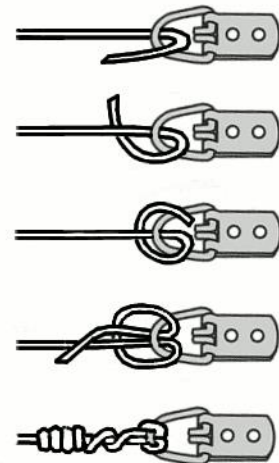

## **Preferred Alternatives**

These are preferred alternatives if the specifications are met. Please come to the gallery if you have any questions before purchasing or installing on your artwork!

### **D Hooks or V Hooks**

D Hooks or V Hooks with approximately 1" opening. One hook positioned on each side approximately 1/3 of the way down from the top. **No Picture Wire necessary.**



**Pictures are correct sizes!**

Print this page and lay your D Hook or V Hook on the picture above to make sure it is at least this size!

### **Picture Wire Loops**

Picture Wire Loops with approximately 1"-2" opening. One Loop positioned on each side approximately 1/3 of the way down from the top.



## Acceptable Alternative

### FoamFast Hooks

FOR SPECIAL DISPLAY PURPOSES ONLY! FoamFast hooks (supplied by WCAC) for pieces attached to foam core. These have spikes that puncture foam core on the back. **WCAC does not recommend showing pieces glued on foam core if they are for sale.**



## UNACCEPTABLE HANGING METHODS

### Sawtooth Hangers



### Plastic, Metal, or Wood Holes/Channels



### Anything on walls!

