

HANGING SPECIFICATIONS

Eye Hooks with Picture Wire

Position 1/3 of the way down from the top. Eye Hooks can be positioned on the inside of the back of the frame/stretched canvas frame or on the face of the back of the frame. The picture wire should be tight (no slack).


Eye Hook Inside Frame:



Eye Hook on Top/Face of Frame:




Tight Wire (NO SLACK)

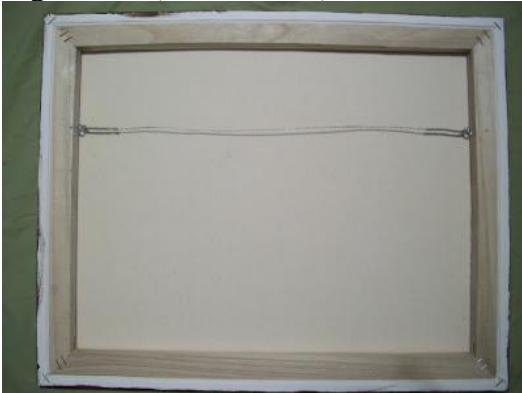

Knot guide for picture wire:

LARK'S HEAD KNOT

Also called...
Lark's foot, Cow
hitch, Girth hitch,
Ring hitch,
Lanyard hitch,
Bale Sling hitch,
Baggage Tag
Loop, Tag Knot,
Deadeye hitch,
Running eye

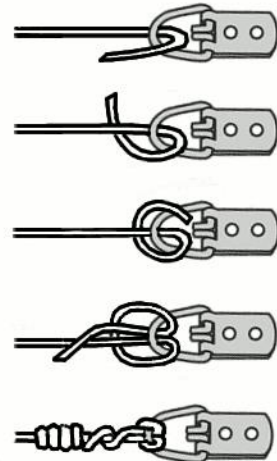

Preferred Alternatives

These are preferred alternatives if the specifications are met. Please come to the gallery if you have any questions before purchasing or installing on your artwork!

D Hooks or V Hooks

D Hooks or V Hooks with approximately 1" opening. One hook positioned on each side approximately 1/3 of the way down from the top. **No Picture Wire necessary.**



Pictures are correct sizes!

Print this page and lay your D Hook or V Hook on the picture above to make sure it is at least this size!

Picture Wire Loops

Picture Wire Loops with approximately 1"-2" opening. One Loop positioned on each side approximately 1/3 of the way down from the top.



Acceptable Alternative

FoamFast Hooks

FOR SPECIAL DISPLAY PURPOSES ONLY! FoamFast hooks (supplied by WCAC) for pieces attached to foam core. These have spikes that puncture foam core on the back. **WCAC does not recommend showing pieces glued on foam core if they are for sale.**



UNACCEPTABLE HANGING METHODS

Sawtooth Hangers



Plastic, Metal, or Wood Holes/Channels



Anything on walls!

